

IB/05/0404



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *AmBrewster*

Dated 21 February 2005

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



19FEB04 EB74349-1 D02813
P01/7700 0.00-0403605.9 ACCOUNT CHA


Patents Form 1/77

Patents Act 1977
(Rule 16)

19 FEB 2004

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



1/77

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your Reference P59053V-GB

2. Patent Application number
(The Patent Office will fill in this part)

0403605.9 ✓

3. Full name, address and postcode of the or each applicant (underline all surnames)

ITW Limited
PO Box 87
Queensway Fforestfach
Swansea
SA5 4YE

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

00527507006
United Kingdom

4. Title of the invention

Pressure Monitoring Device for a Paint Spray Gun

5. Name of your agent (if you have one)

FRY HEATH & SPENCE LLP

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The Gables
Massetts Road
Horley
Surrey
RH6 7DQ
United Kingdom

Patents ADP Number (if you know it)

0588027300T

08459554001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications filed in the last 12 months.

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f).

Number of earlier application

Date of filing
(day / month / year)

8. Is a Patents Form 1/77 (Statement of Yes inventorship and of right to grant of a patent) required in support of this request?

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form 0

Description 11

Claim(s) 5

Abstract 1

Drawing(s) 5

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents form 9/77) 1

Request for substantive examination (Patents form 10/77) 0

Any other documents (please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Victoria J Townsend

18 February 2004

12. Name and daytime telephone number of person to contact in the United Kingdom Victoria J Townsend - 01293 776880

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you filing or applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under sections 8(3), 12(6) and 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should complete part 6 with the priority details.

DUPLICATE

1

PRESSURE MONITORING DEVICE FOR A PAINT SPRAY GUN

This invention relates to pressure gauges, more particularly, to pressure gauges used to monitor the flow of gas in a gas powered, hand held instrument such as a paint spray gun.

Paint spray guns are well known in which gas under pressure is used to atomise fluid (such as paint) through a nozzle of the gun to form a spray. Typically, the gas under pressure is air from a compressed air supply. Such guns are generally provided with an air flow valve adjacent the air inlet of the gun which can be adjusted to control the airflow into the gun. Paint is supplied to the gun through a separate inlet and its flow rate can also be adjusted by means of a fluid flow valve. The nozzle is located in a spray head which comprises the nozzle and an air cap positioned around the nozzle. A spreader valve associated with the air cap is operable to adjust air flow to outlets in a pair of horns provided on the air cap. Air meeting the paint at the spray head atomises the paint to produce a spray which is released from the gun via the nozzle. The spread, shape and size of atomised plume leaving the gun can be adjusted by adjusting the spreader valve, changes in air pressure at the air cap result in adjustment of the area covered by a spray released from the gun.

In order that various air flows and pressures within the gun can be monitored and controlled, paint guns are often provided with pressure gauges. These pressure gauges come in analogue and digital form, they may be attachable to the gun at or adjacent an air or fluid inlet or may be incorporated into the main body of the gun. Examples of some prior art pressure gauge arrangements are summarised below.

In EP 526 525 a miniature digital electronic air pressure gauge is threaded into a threaded bore provided in the body of a compressed air spray gun. Internally of the gun, the air pressure gauge is arranged to be

2

in communication with a passage which leads to a region downstream of both the air flow valve and a trigger operated air on/off valve.

The ITW OMX-610 spray gun has a similar threaded bore which receives an analogue pressure gauge. In this spray gun, the gauge communicates with a region downstream of the air flow valve but upstream of the trigger operated air on/off valve.

US Patent 6 585 173 B2 discloses a pressure gauge which is integrated into the handle of a paint spray gun.

The inventors co-pending patent application EP 03252727.7 discloses a pressure gauge which is retro-fittable to a spray gun by mounting on an adapted valve bushing of a spreader valve or fluid flow valve.

Experience has shown that retro fittable gauges are not best suited to monitor the air pressure to the gun as they cannot be optimally positioned with respect to the air inlet and air flow valve. The introduction of a thread by means of which the gauge is typically attached can itself disrupt the air flow in the region where the measurement is taken. Furthermore, the addition of an awkwardly shaped or sized gauge to a gun can imbalance the gun and interfere with the user's normal operation of the gun.

Whilst there is more flexibility in positioning of integrated gauges, these gauges have historically been designed into existing gun designs. Integrated designs must address ergonomics as well as technical requirements and the result is often a compromise of the two. Consequently the adapted designs may not be the most ergonomic or have the most optimally positioned take off point for the gauge. In addition, such guns are inherently more expensive than existing guns to which gauges can be retrofitted. Furthermore, integrated arrangements

3

are expensive and complex to repair should the gauge become damaged. In some circumstances, the entire gun may need to be replaced.

Manufacturers of paint and/or paint spray guns recommend standard pressures for air at the air inlet of a gun to achieve a desired paint finish or colour match, thus it is desirable to be able to accurately monitor and control pressure of air entering the air inlet. From a technical perspective, it is desirable to have the pressure take off point close to or directly downstream of the air flow valve, this has not been achieved with prior art arrangements as such positioning of a gauge with respect to air flow valves of existing guns is contrary to ergonomics.

The present invention aims to provide a pressure monitoring device for a paint spray gun which at least in part alleviates problems recognised in prior art arrangements.

In accordance with the present invention there is provided a pressure monitoring device for a paint spray gun the pressure monitoring device comprising;

- a housing having an air inlet, an air outlet and an air passage connecting the inlet and the outlet;

- means for coupling the air inlet with an outlet of a compressed air supply and means for coupling the air outlet with an air inlet of a paint spray gun;

- a digital pressure gauge housed in the housing and positioned to monitor pressure at a pressure take off point in the air passage;

- a valve housed in the housing and operable to adjust air flow in the air passage;

- valve adjustment means associated with the valve and accessible externally of the housing; wherein the air inlet, air outlet and air passage are shaped and the valve is positioned so as to provide minimal turbulence of air flow and minimal pressure drop through the device and the pressure take off point is downstream of the valve.

Conveniently, the inlet and the outlet are arranged substantially in line with each other. Such an arrangement allows the housing to be compact and of uniform shape.

The air inlet and outlet may comprise a pair of cavities, each cavity having a substantially circular cross sectioned portion adjacent the entry of the air inlet and exit of the air outlet and a substantially segmental cross sectioned portion adjacent the pressure take off point and passing through a plane which includes the valve seat, the substantially circular and segmental cross-sectioned portions being separated by a tapered section tapering from the circumference of the circular cross sectioned portion to the chord of the segmental cross sectioned portion. The cavities are desirably arranged on either side of a longitudinal axis of the housing with the chords in substantially parallel alignment.

The air passage is conveniently provided in the form of a bore which passes through the two segmental sections. Desirably the air passage bore has an axis which is substantially orthogonal to the longitudinal axis of the housing. The tapered sections of the two cavities may be at the same angle or at different angles.

One or both of the segmental cross-sectioned portions may terminate in a taper extending from the chord to the arc of the segment, desirably such that the chord surface of the segmental cross sectioned portion is longer than the arched surface. In such embodiments, the pressure take off point is desirably situated in the taper.

In one embodiment, the air inlet and air outlet comprise a pair of cavities of substantially the same size and shape oriented in mirrored symmetry at 180° rotational separation about a common axis which passes centrally through the aligned air inlet and air outlet, each cavity having a substantially circular cross sectioned portion adjacent the entry

5

of the air inlet and exit of the air outlet and a substantially segmental cross sectioned portion adjacent the pressure take off point and passing through a plane which includes the pressure take off point, the substantially circular and segmental cross-sectioned portions being separated by a tapered section tapering from the circumference of the circular cross sectioned portion to the chord of the segmental cross sectioned portion.

The tapers are desirably at an angle of from about 30° to about 80° with respect to the common axis (or longitudinal axis of the housing), more desirably between about 55° and 80° and preferably between about 60° and 70° .

The air passage is conveniently formed by provision of a bore having a central axis aligned orthogonally with respect to both the common axis of the air inlet and air outlet and the chords of the segmental cross sectioned portions, and the valve seat is located in the bore.

Desirably, the digital gauge has a human readable display visible at a surface of the housing. Preferably, the gauge display and valve adjustment means are arranged in line with each other on opposing surfaces of the housing and in a plane substantially orthogonal to the plane which contains the air inlet and air outlet. This configuration is desirable for aesthetic and ergonomic reasons. It is to be understood that other configurations would still perform the desired technical effect and are not intended to be excluded from the scope of the appended claims.

The housing, including the air inlet and air outlet is conveniently die cast or injection moulded. Optionally, the housing is die cast from zinc allowing the device to be cleaned using conventional paint gun cleaning techniques. Desirably, the housing is engineered to have an IP66 casing integrity, i.e high resistance to ingress of dust and fluid. Such a housing

6

would permit the device to be cleaned with a paint spray gun in a conventional gun wash machine.

The valve is conveniently a needle valve and the valve adjustment means a screw threaded knob. Desirably the thread of the knob is selected to allow very fine adjustment of the air flow, increments of adjustment being at least comparable to the resolution of the pressure gauge.

The inventors have found that by providing a retro fittable pressure monitoring device fittable between an air supply and the air inlet of a paint spray gun and incorporating an air flow valve within the device, many advantages are gained over conventional arrangements.

As the valve, gauge, air outlet and inlet and an air passage are all incorporated in the device, each can be engineered and positioned to ensure that the pressure take off point is positioned in a region where there is minimal turbulence of air flowing through the air passage. With the pressure take off point located close to and downstream of the air flow valve, it is possible to obtain very accurate measurements of pressure of air entering the gun inlet. The integrated device is more compact and lightweight than conventional "add-on" arrangements yet can conveniently be retro fitted to existing guns. The devices are easily replaceable in the event they are damaged without the need to tamper with or replace the gun.

It will be appreciated that various coupling means may be used to couple the air inlet and air outlet of the device respectively to a compressed air supply and air inlet of a paint spray gun, the coupling means can be selected from known coupling devices specifically for a given gun and air supply combination. The device is highly adaptable and retro fittable to a wide variety of paint gun designs.

7

It will be appreciated that the inclusion of an air flow valve in the device renders redundant the air flow valve conventionally provided on a paint spray gun, such valves could, in future be omitted from newly manufactured guns thereby reducing the costs of manufacture of the gun.

For the purposes of exemplifications, an embodiment of the invention will now be further described with reference to the following figures in which:

Figure 1 shows a longitudinal cross section through an embodiment of a pressure monitoring device in accordance with the invention.

Figure 2 shows a transverse cross section through the embodiment of Figure 1.

Figure 3 shows in various views the embodiment of Figures 1 and 2.

Figure 4 shows in more detail views of the housing of the embodiment of Figures 1 to 3.

Figure 5 shows in more detail, the valve and valve adjusting means of the embodiment of Figures 1 to 4.

Figure 6 shows in isometric projection the shape of the combined air inlet, air outlet and air passage of the embodiment of the invention, in longitudinal cross section.

Figure 7 illustrates how the shape of Figure 6 may be formed from a die cast or injection moulded air inlet and outlet and a later added bore.

Figure 8 shows generally a paint spray gun retro fitted with the embodiment of a Figures 1 to 4.

8

As can be seen from Figures 1 and 2, a pressure monitoring device in accordance with the present invention comprises a housing 1 within which are provided an air inlet 2 and an air outlet 3. Connecting the air inlet 2 and the air outlet 3 is an air passageway 4 which includes a pressure take off point 9. The air inlet 2 includes a threaded bore section 2a into which is screwed a coupling device 7 for coupling with the air outlet of a compressed air supply. The air outlet 3 is also configured to receive a coupling device 8 for coupling with the air inlet of a paint spray gun. As is clear from Figure 1 an end of the air outlet cavity terminates in a taper extending from the chord to the arc of the segment of the cavity. The pressure take off point 9 is located in the tapered end portion of the air outlet

A digital pressure gauge 5 is housed in a top surface of the housing 1 as shown in the figures. The gauge samples air pressure at the pressure take off point 9 through conduit 9a.

Screw threaded into a bore 11 in the housing is a needle valve 6 which can be adjusted by means of valve adjustment means 10a, 10b to move further towards or away from the pressure take off 9. The operation of the valve adjustment means is discussed in more detail in relation to Figure 5.

Figure 3 shows various views of the device illustrated in Figures 1 and 2. Figure 3a shows an isometric view. Figure 3b shows a plan view of the device with the gauge 5 present. It can be seen that the gauge includes a display 5a visible through a window in the housing 1. Figure 3c illustrates a front view of the device and Figure 3d illustrates a right end view.

Figure 4 illustrates in various views the housing with the couplings 7, 8, gauge 5, valve 6 and valve adjusting means 10a, 10b removed. Figure 4a shows an isometric view of the housing, Figure 4b a plan view,

9

Figure 4c a front view, Figure 4d a bottom view, Figure 4e a left end view and Figure 4f a right end view. Figure 4g illustrates the view of Figure 4c in cross section.

Figure 5 shows in more detail the valve 6 and valve adjustment means 10a, 10b. The arrangement comprises a main valve body 18 which carries a threaded member 14 having an external, left hand thread 17 onto which is screwed a valve closure member 6a. At an opposing end of the threaded member 14, the threaded member is provided with a bore 13 having an internal screw thread 13a into which is screwed an adjustment screw 10b, which secures adjustable knob 10a to the threaded member 14 and main valve body 18. an O-ring 15 seals the valve. As can be seen in Figure 1, the assembled valve 6 and valve adjustment means 10a, 10b can be screwed into a bore 11 of the housing 1 by means of complementary screw threads provided in the bore and on the main valve body 18.

It will be appreciated that turning of knob 10a will cause turning of screw 10b which in turn will travel along the screw thread 13a of the threaded member 14 causing the valve closure member 6a to extend from or be withdrawn into (depending on the direction in which the knob 10a is turned) the main valve body 18.

Figure 6 shows generally the shape of the space defined by the air inlet 2, air outlet 3, connecting air passage 4 and bore 11 within the housing 1. Figure 7 shows how the shape can be formed from a pair of cavities 72, 73 of substantially the same size and shape oriented in mirrored symmetry at 180° rotational separation about a common axis X which passes centrally through the aligned air inlet and air outlet, each cavity having a substantially circular cross sectioned portion adjacent the entry of the air inlet and exit of the air outlet and a substantially segmental cross sectioned portion 72a, 73a adjacent to the pressure take off point and passing through a plane which includes the pressure take off

10

point, the substantially circular and segmental cross-sectioned portions being separated by a tapered section 72b, 73b tapering from the circumference of the circular cross sectioned portion to the chord of the segmental cross sectioned portion.

As illustrated, the air passage is formed by the introduction of a bore 74 (which extends from bore 711) having a central axis Y aligned orthogonally with respect to both the common axis X of the air inlet and air outlet and the chords of the segmental cross sectioned portions.

It will be appreciated that the general shape of the air inlet, outlet and connecting passage may have applications in other gas flow devices, for example but not strictly limited to pneumatic component valves. In another aspect, therefore, the invention comprises a gas flow passage comprising a pair of cavities of substantially the same size and shape oriented in mirrored symmetry at 180° rotational separation about a common axis which passes centrally through the aligned cavities, each cavity having a substantially circular cross sectioned portion adjacent the points of entry and exit to the passage and a substantially segmental cross sectioned portion, the substantially circular and segmental cross-sectioned portions being separated by a tapered section tapering from the circumference of the circular cross sectioned portion to the chord of the segmental cross sectioned portion, the pair of cavities being connected by a bore having a central axis aligned orthogonally with respect to both the common axis of the two cavities and the chords of the segmental cross sectioned portions.

The taper is desirably at an angle of from about 30° to about 80° with respect to the common axis, more desirably between about 55° and 80°. In a preferred embodiment, the angle of the taper of the inlet is about 60° and that of the outlet is about 75°.

11

As is shown in Figure 8, a paint spray gun 81 generally comprises a gun body 87 having a trigger 86 mounted thereon. At the top end of the gun is an air cap 84 which surrounds a nozzle (not shown) through which atomised paint is delivered. Air flow to the nozzle 84 can be adjusted by means of spreader valve 83. Near to the nozzle is a paint inlet port 85 to which a supply of paint (not shown) can be connected. Situated just below the spreader valve 83 is a fluid flow valve 82 which can be adjusted to control the flow rate of paint being delivered to the gun 81. Supply of fluid to the gun 81 is generally controlled by operation of the trigger 86. At the bottom of the gun 81 is an air inlet port 88 and adjacent to the air inlet port 88 is an air flow valve 89 operable to adjust the flow rate of air entering the inlet port 88. Connected to the air inlet port 88 by means of coupling 8 is a pressure monitoring device 80 as previously described. It will be appreciated that with the pressure monitoring device 80 in place, the air flow valve 89 becomes redundant, as air flow can be adjusted by means of the valve 6 embodied and valve adjustment means 10a, 10b embodied in the pressure monitoring device 80.

It is to be understood that the foregoing is merely exemplary of just one embodiment of the invention, others of which will readily occur to the skilled addressee without departing from the scope of the invention as defined by the appended claims. The illustrations and specific description are not intended strictly to limit the scope of the invention as claimed.

CLAIMS

1. A pressure monitoring device for a paint spray gun the pressure monitoring device comprising;
 - a housing having an air inlet, an air outlet and an air passage connecting the inlet and the outlet;
 - means for coupling the air inlet with an outlet of a compressed air supply and means for coupling the air outlet with an air inlet of a paint spray gun;
 - a digital pressure gauge housed in the housing and positioned to monitor pressure at a pressure take off point in the air passage;
 - a valve housed in the housing and operable to adjust air flow in the air passage;
 - valve adjustment means associated with the valve and accessible externally of the housing; wherein the air inlet, air outlet and air passage are shaped and the valve is positioned so as to provide minimal turbulence of air flow and minimal pressure drop through the device and the pressure take off point is downstream of the valve.
2. A pressure monitoring device as claimed in claim 1 wherein the air inlet and air outlet are arranged in line with each other.
3. A pressure monitoring device as claimed in claim 1 or 2 wherein air inlet and outlet comprises a pair of cavities, each cavity having a substantially circular cross sectioned portion adjacent the entry of the air inlet and exit of the air outlet and a substantially segmental cross sectioned portion adjacent the pressure take off point and passing through a plane which includes the valve seat, the substantially circular and segmental cross-sectioned portions being separated by a tapered section tapering from the circumference of

13

the circular cross sectioned portion to the chord of the segmental cross sectioned portion.

4. A pressure monitoring device as claimed in claim 3 wherein the cavities are arranged on either side of a longitudinal axis of the housing with the chords in substantially parallel alignment.
5. A pressure monitoring device as claimed in claim 3 or 4 wherein the air passage is provided in the form of a bore which passes through the two segmental sections and the pressure take off point is located in the bore.
6. A pressure monitoring device as claimed in claim 5 wherein the air passage bore has an axis which is substantially orthogonal to the longitudinal axis of the housing.
7. A pressure monitoring device as claimed in any of claims 3 to 6 wherein the tapered sections of the two cavities are at the same angle.
8. A pressure monitoring device as claimed in any of claims 3 to 6 wherein the tapered sections of the two cavities are at different angles.
9. A pressure monitoring device as claimed in any of claims 3 to 8 wherein the cavities are of substantially the same size and shape and oriented in mirrored symmetry at 180° rotational separation about a common axis which passes centrally through the aligned air inlet and air outlet.
10. A pressure monitoring device as claimed in any of claims 3 to 9 wherein one or both of the segmental cross-sectioned portions

14

terminate in a taper extending from the chord to the arc of the segment.

11. A pressure monitoring device as claimed in claim 10 wherein the chord surface of the segmental cross sectioned portion is longer than the arced surface.
12. A pressure monitoring device as claimed in claim 10 or 11 wherein the pressure take off point is situated in the taper.
13. A pressure monitoring device as claimed in any of claims 3 to 12 wherein the taper is at an angle of from about 30° to about 80° with respect to the longitudinal axis of the housing.
14. A pressure monitoring device as claimed in claim 13 wherein the taper is at an angle of between 55° and 80° .
15. A pressure monitoring device as claimed in claim 14 wherein the taper is at an angle of 60° at the inlet and 75° at the outlet.
16. A pressure monitoring device as claimed in any preceding claim wherein the digital gauge has a human readable display visible at a surface of the housing.
17. A pressure monitoring device as claimed in any preceding claim wherein the gauge display and valve adjustment means are arranged in line with each other on opposing surfaces of the housing and in a plane substantially orthogonal to the plane which contains the air inlet and air outlet.
18. A pressure monitoring device as claimed in any preceding claim wherein the housing, including the air inlet and air outlet is die cast or injection moulded.

19. A pressure monitoring device as claimed in claim 18 wherein the housing is die cast from zinc.
20. A pressure monitoring device as claimed in any preceding claim wherein the housing is engineered to have an IP66 casing integrity.
21. A pressure monitoring device as claimed in any preceding claim wherein the valve is a needle valve and the valve adjustment means a screw threaded knob.
22. A pressure monitoring device as claimed in claim 21 wherein the thread of the knob is selected to allow very fine adjustment of the air flow, increments of adjustment being at least comparable to the resolution of the pressure gauge.
23. A pressure monitoring device substantially as described herein and with reference to the accompanying Figures 1 to 8.
24. A paint spray gun having coupled to its air inlet, a pressure monitoring device as claimed in any of claims 1 to 23.
25. A gas flow passage comprising a pair of cavities, each cavity having a substantially circular cross sectioned portion adjacent the entry of the inlet and exit of the outlet of the passage and a substantially segmental cross sectioned portion, the substantially circular and segmental cross-sectioned portions being separated by a tapered section tapering from the circumference of the circular cross sectioned portion to the chord of the segmental cross sectioned portion, the cavities being joined by a bore passing through each of the segmental cross sectioned portions.

16

26. A gas flow passage as claimed in claim 25 wherein the cavities are arranged on either side of a longitudinal axis of the housing with the chords in substantially parallel alignment.
27. A gas flow passage as claimed in claim 25 or 26 wherein the tapered sections of the two cavities are at the same angle.
28. A gas flow passage as claimed in claim 25 or 26 wherein the tapered sections of the two cavities are at different angles.
29. A gas flow passage as claimed in any of claims 25 to 28 wherein the cavities are of substantially the same size and shape and oriented in mirrored symmetry at 180° rotational separation about a common axis which passes centrally through the aligned air inlet and air outlet.
30. A gas flow passage as claimed in any of claims 25 to 29 wherein one or both of the segmental cross-sectioned portions terminate in a taper extending from the chord to the arc of the segment.
31. A gas flow passage as claimed in claim 30 wherein the chord surface of the segmental cross sectioned portion is longer than the arced surface.
32. A gas flow passage having a shape substantially as illustrated in Figures 6 or 7.



ABSTRACT**PRESSURE MONITORING DEVICE FOR A PAINT SPRAY GUN**

A pressure monitoring device in accordance with the present invention comprises a housing 1 within which are provided an air inlet 2 and an air outlet 3. Connecting the air inlet 2 and the air outlet 3 is an air passage way 4 which includes a pressure take off point 9. The air inlet 2 includes a threaded bore section 2a into which is screwed a coupling device 7 for coupling with the air outlet of a compressed air supply. The air outlet 3 is also configured to receive a coupling device 8 for coupling with the air inlet of a paint spray gun. A digital pressure gauge 5 is housed in a top surface of the housing 1 as shown in the figures. The gauge samples air pressure at the pressure take off point 9 through conduit 9a. Screw threaded into a bore 11 in the housing is a needle valve 6 which can be adjusted by means of valve adjustment means 10a, 10b to move further towards or away from the pressure take off 9.

[Fig. 1]



1/5

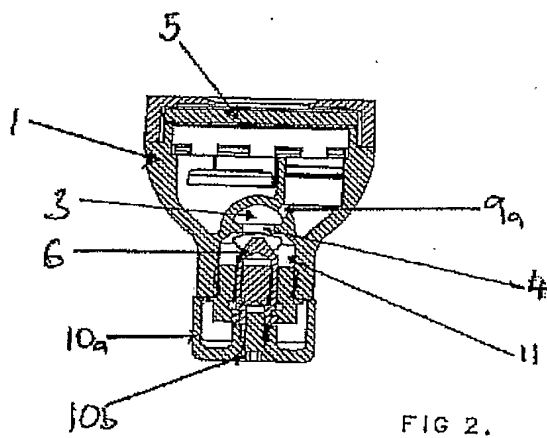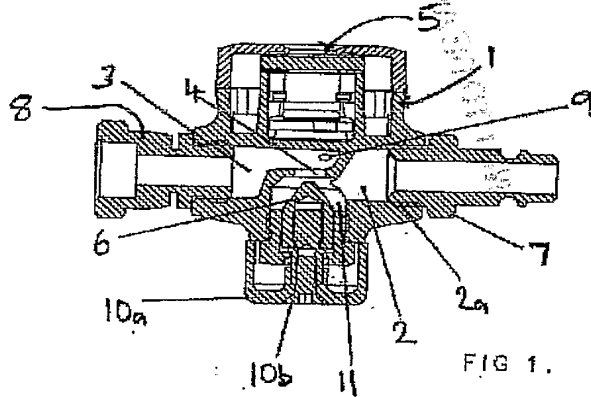



2/5





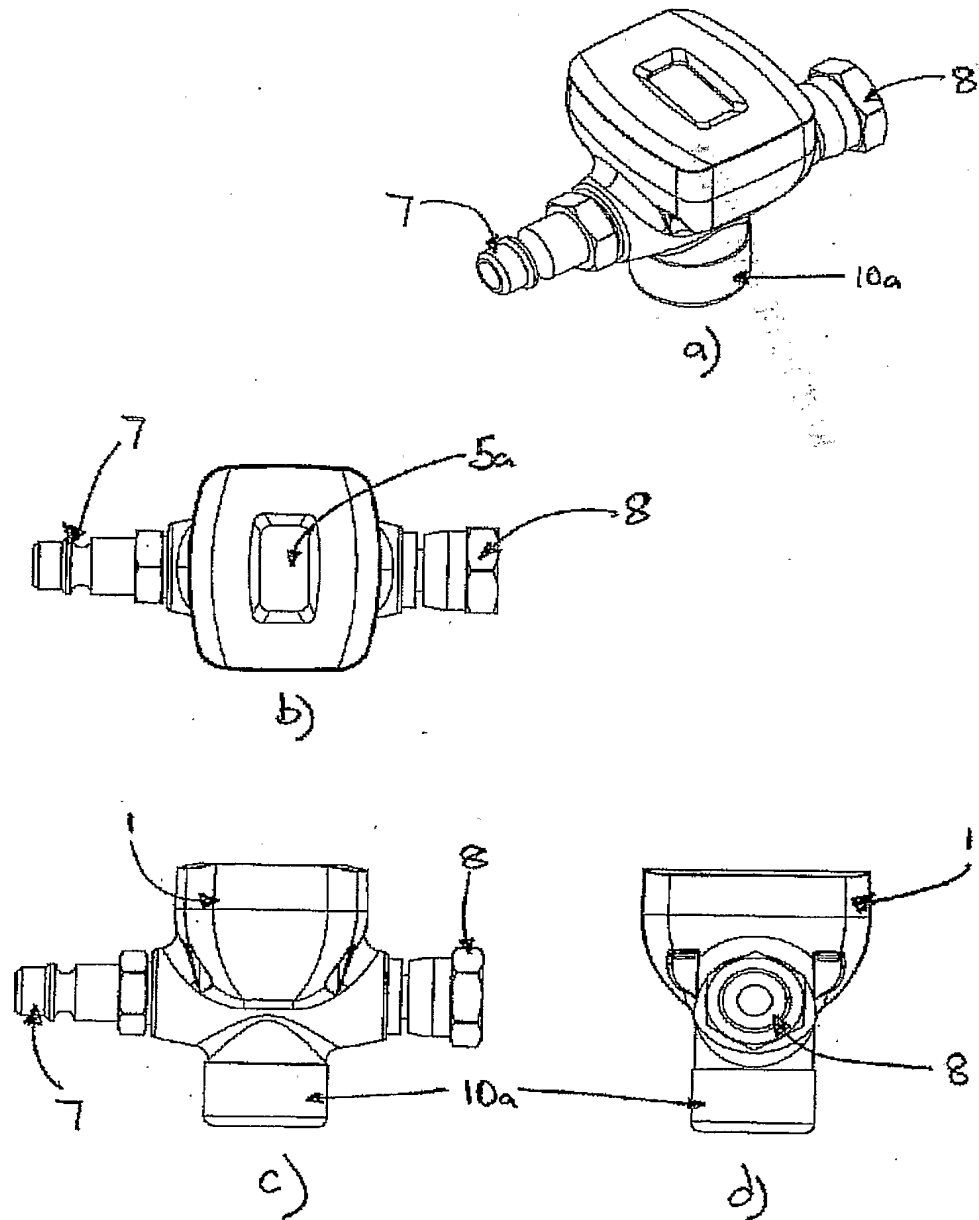


FIG. 3






3/5

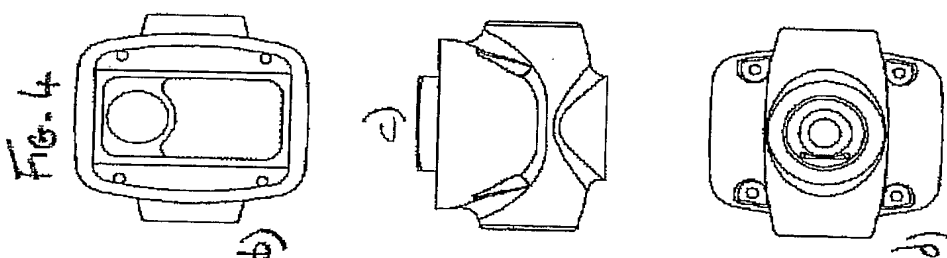

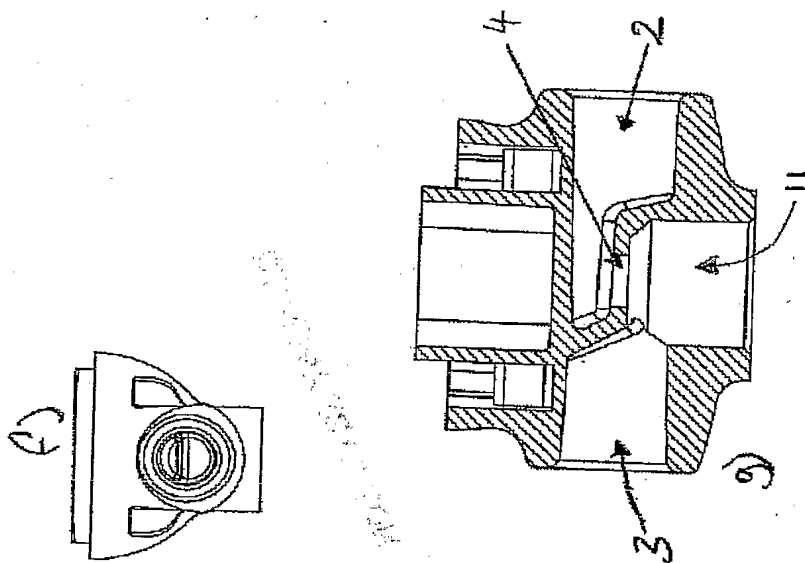

0

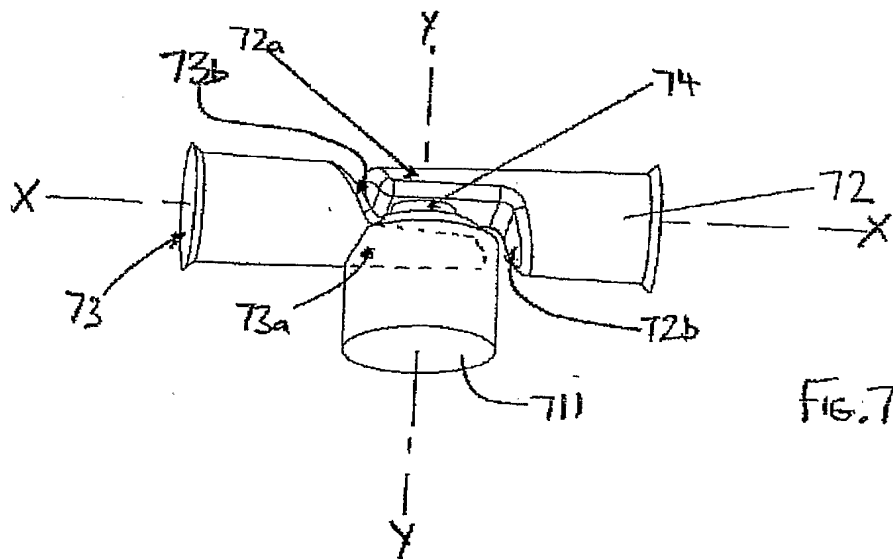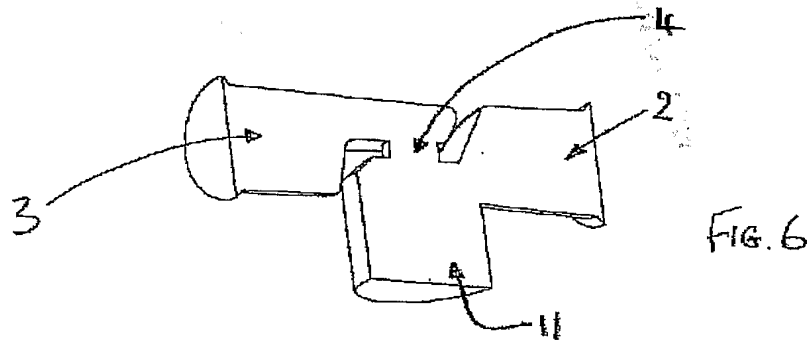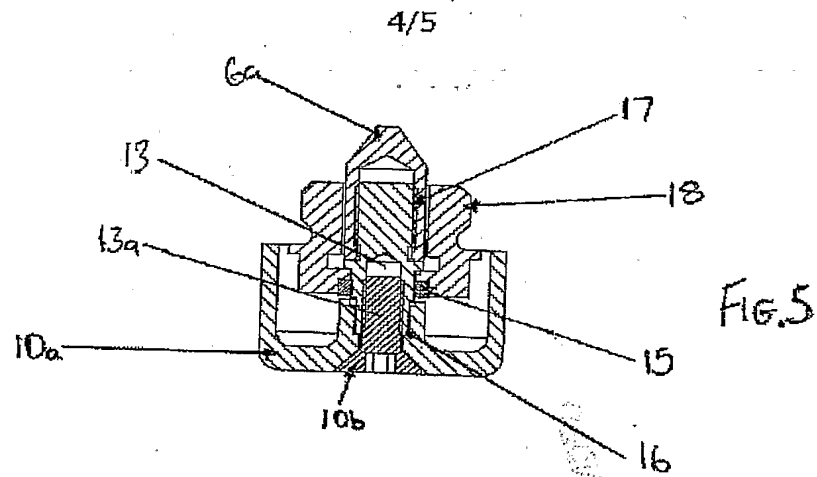



5/5

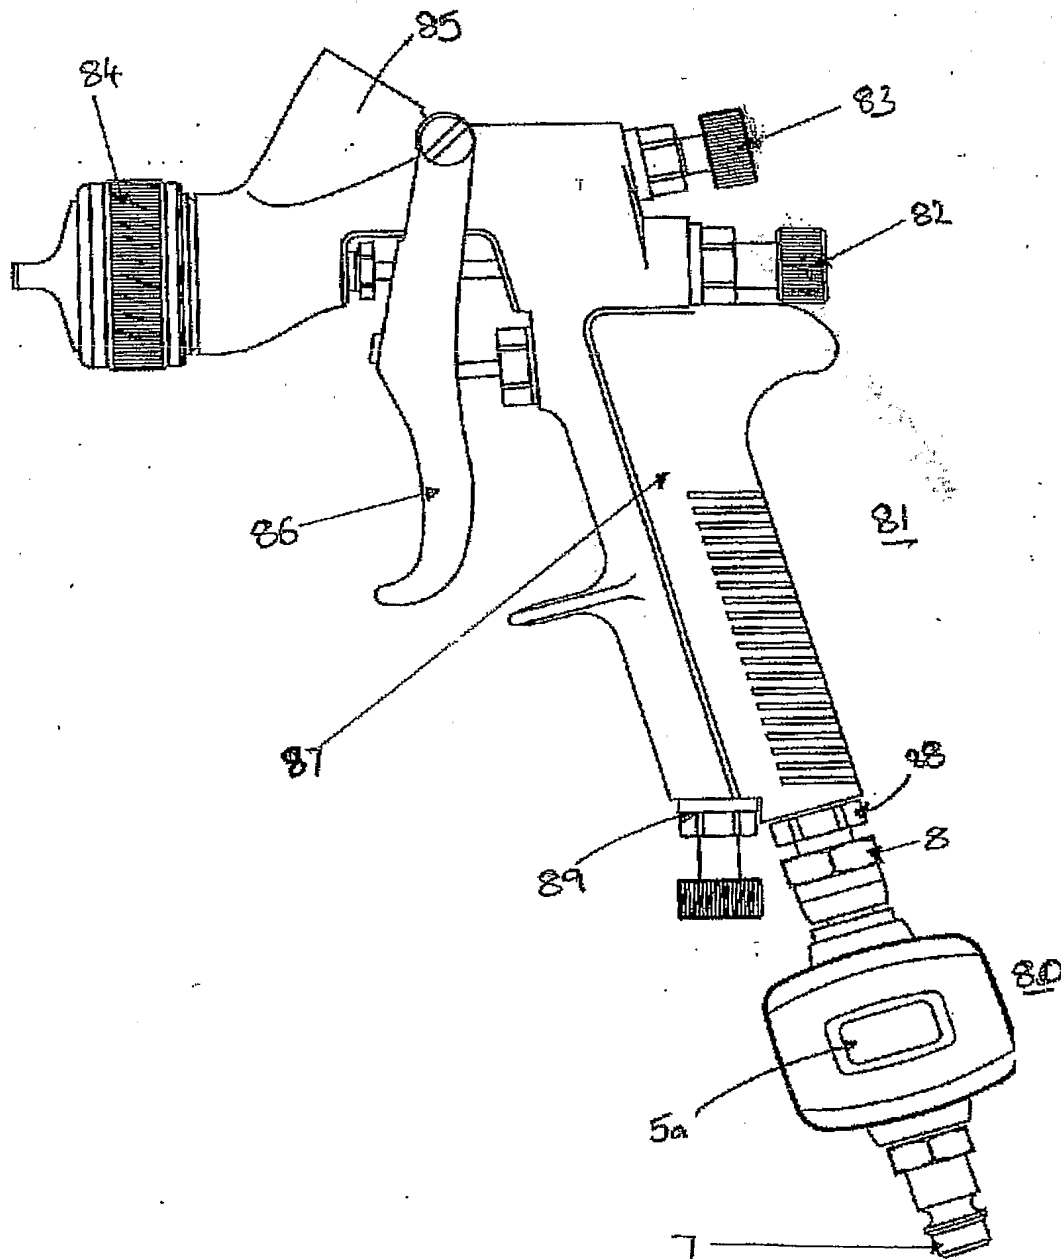


Fig. 8

PCT/IB2005/000404

